


Short information

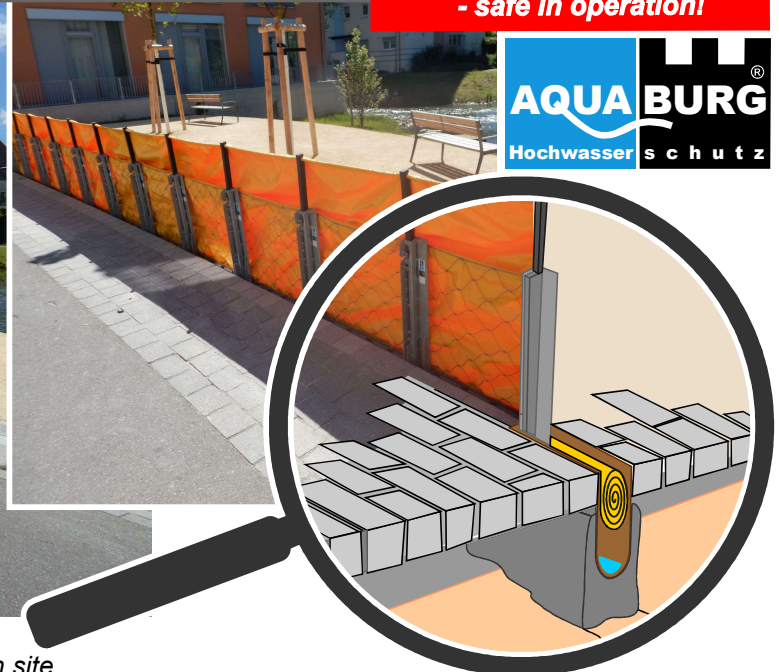


Picture: The AquaWand, stored invisibly in standby mode on site.

The only thing to be seen is a line drainage. In fact, all components are concealed under the traversable cover.


With the AquaWand, fast, targeted action can be implemented by anyone with minimal effort (a trained team = 1 m² AquaWall / 1 man-minute).

AB Overview of the different AquaWand types:

The AquaWand - in the floor

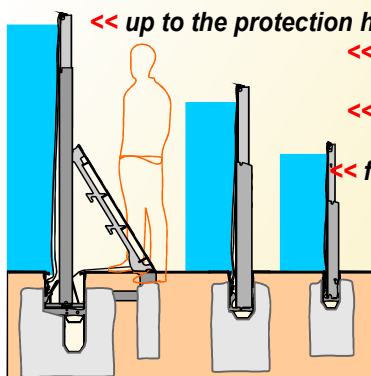

- in the wall

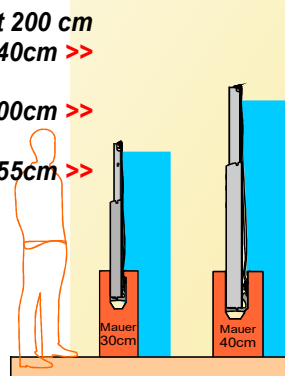

The protective heights of the AquaWand can be selected from 55 cm to 200 cm. The different AquaWand types can be installed in a trench, in a wall or dike can be installed.

AB The most important strengths at a glance:

Quick:


- Storage on site
- Fast self-sufficient assembly
- Assembly without qualified

Cheap:

- No storage costs
- No logistics costs
- Very low personnel costs

Safe:

- Very robust
- Underwashing protection
- Large impact protection
- High system stability

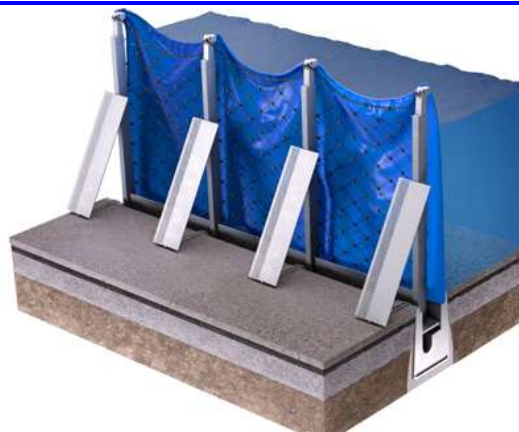

AB Contact:



Awards



NEW:

AB The economical AquaVerschluss

The AquaVerschluss simply screwed into ground sleeves or quickly stuck into a floor rail



The economical AquaVerschluss is simply brought to the place of use and assembled easily.

advantages:

- simple
- hardly any logistics (fits on Euro pallets)
- cheap

